


**Manual
Transfer
Switches**

**Commercial/Residential
For Portable Generators**



Model 6375



Model 6377



Model 6376



Model 6378 & 6380



Model 6379 & 6381




Model 6382 & 6335



Model 6333 & 6334

- Safely and easily deliver power from your portable generator to your home's electrical panel during a power outage.

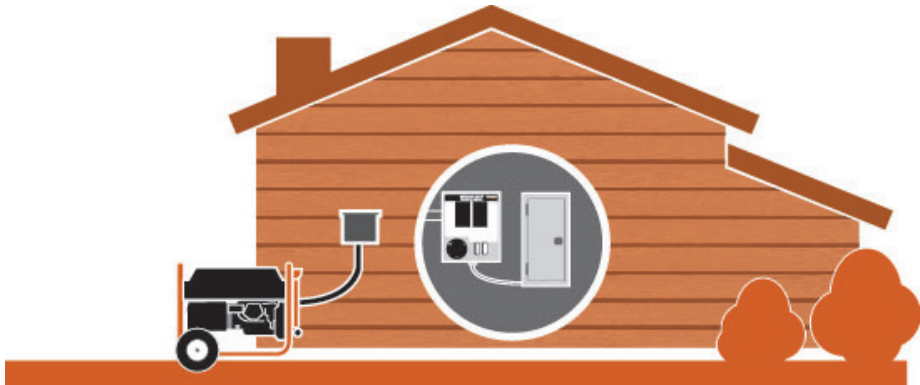



Manual Transfer Switches

Specifications

| Model | 6375 | 6376 | 6377 | 6378 | 6379 | 6380 | 6381 |
|--|------------------|--|---|--|--|---|---|
| UPC | 696471063752 | 696471063769 | 696471063776 | 696471063783 | 696471063790 | 696471063806 | 696471063813 |
| Circuits | Single Circuit | 6-10 Circuits | Single Circuit | 10-16 Circuits | 10-16 Circuits | 12-16 Circuits | 12-16 Circuits |
| # of Circuits Provided | 1 | 6 | 2 | 10 | 10 | 12 | 12 |
| Max # of Circuits | 1 | 10 | 2 | 16 | 16 | 16 | 16 |
| Max Amperage | 15 | 30 | 30 | 30 | 30 | 50 | 50 |
| Voltage | 125 | 125/250 | 125/250 | 125/250 | 125/250 | 125/250 | 125/250 |
| Included Breakers | 15 Amp 1-pole | 2 x 15 amp 1-pole, 2 x 20 amp 1-pole, 1 x 20 amp 2-pole | 30 amp 2-pole | 3 x 15 amp 1-pole, 3 x 20 amp 1-pole, 1 x 20 amp 2-pole, 1 x 30 amp 2-pole | 3 x 15 amp 1-pole, 3 x 20 amp 1-pole, 1 x 20 amp 2-pole, 1 x 30 amp 2-pole | 3 x 15 amp 1-pole, 3 x 20 amp 1-pole, 1 x 20 amp 2-pole, 1 x 30 amp 2-pole, 1 x 50 amp 2-pole | 3 x 15 amp 1-pole, 3 x 20 amp 1-pole, 1 x 20 amp 2-pole, 1 x 30 amp 2-pole, 1 x 50 amp 2-pole |
| Required Main Breaker in Load Center | - | 2-pole 60 amp | - | 2-pole 60 amp | 2-pole 60 amp | 2-pole 100 amp | 2-pole 100 amp |
| Enclosure Type | NEMA 3R | NEMA 1 | NEMA 3R | NEMA 1 | NEMA 3R | NEMA 1 | NEMA 3R |
| NEMA Configuration of inlet | NEMA 5-15 | L14-30 | L14-30 | L14-30 | L14-30 | CS6365 | CS6365 |
| Compatible Generac Generators | iX 1600, iX 2000 | GP3250, LP3250, XG4000, XP4000, GP5500, GP6500E, GP7500E, XG6500, XG7000E, XG8000E, XP6500E, XP8000E | GP3250, LP3250, XG4000, XP4000, GP5500, H5500/E, GP6500E, GP7500E, XG6500, XG7000E, XG8000E, XP6500E, XP8000E | GP3250, LP3250, XG4000, XP4000, GP5500, GP6500E, GP7500E, XG6500, XG7000E, XG8000E, XP6500E, XP8000E | | GP15000E, GP17500E, XG10000E | |
| Compatible Generac GenTran Power Inlet Boxes (Model #'s) | - | 6337, 6340, 6343, 6346 | 6337, 6340, 6343, 6346 | 6337, 6340, 6343, 6346 | | 6338, 6341, 6344, 6347 | |
| Warranty | 2 Years | | | | | | |

| Model | 6382 | 6335 | 6333 | 6334 |
|-------------------------------------|--|--------------------------------|---|---------------------------------|
| UPC | 696471063820 | 696471063356 | 696471063332 | 696471063349 |
| Circuits | 200 Amp Service Entrance Rated | 200 Amp Service Entrance Rated | Single Load 60 Amp double-pole | Single Load 100 Amp double-pole |
| Generator Main | 30 amps | 50 amps | 60 amps | 100 amps |
| Utility Main | 200 amps | 200 amps | 60 amps | 100 amps |
| Max # of spaces for branch circuits | 12 | 12 | 0 | 0 |
| Enclosure Type | NEMA 3R | NEMA 3R | NEMA 1 | NEMA 1 |
| NEMA Configuration of inlet | L14-30 | CS6365 | - | - |
| Compatible Generac Generators | GP3250, LP3250, XG4000, XP4000, GP5500, GP6500E, GP7500E, XG6500, XG7000E, XG8000E | GP15000E, GP17500E, XG10000E | Any generator between 3,000 and 25,000 watts. | |
| Warranty | 2 Years | | | |

Note: XP units require switch neutral kit Model 6297.

| Accessories | |
|---|--|
| <p>30 Amp Switch Neutral Kit - Model 6297</p> <ul style="list-style-type: none"> • Prewired Contactor • Wire Harness • Wire Connectors (3) • Insulated 8-position terminal block • For use with 30amp manual transfer switches | <p>*Enables manual transfer switches to isolate the utility and generator neutrals.</p>  <p>*Mounts inside the switch</p> |
| <p>Flush Mounting Plate - Model 6383</p> <ul style="list-style-type: none"> • Flush mount your transfer switch into a finished wall. • Compatible with manual transfer switch models 6294, 6376, 6408. |  |

Dimensions and Weights

| Model | 6375 | 6376 | 6377 | 6378 | 6379 | 6380 | 6381 | 6382 | 6333 | 6334 | 6335 |
|---------------------------|--------------------------------|--------------------------------------|--------------------------------|---------------------------------------|----------------------------------|---------------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Product L x W x H in (mm) | 9 x 6 x 5 (229 x 152 x 127) | 9.25 x 11 x 3.25 (235 x 279 x 83) | 9 x 6 x 5 (229 x 152 x 127) | 14.5 x 11.5 x 3.5 (368 x 292 x 89) | 18 x 18 x 4 (457 x 457 x 102) | 14.5 x 11.5 x 3.5 (368 x 292 x 89) | 18 x 18 x 4 (457 x 457 x 102) | 18 x 18 x 4 (457 x 457 x 102) | 11 x 13 x 4 (279 x 330 x 102) | 11 x 13 x 4 (279 x 330 x 102) | 18 x 18 x 4 (457 x 457 x 102) |
| Product Weight lbs (kg) | 5 (2.25) | 13 (6) | 5 (2.25) | 24 (11) | 23 (10.5) | 26 (11.75) | 29 (13) | 21 (9.5) | 10 (4.5) | 10 (4.5) | 21 (9.5) |

GENERAC®

Generac Power Systems, Inc. • P.O. Box 8, Waukesha, WI 53187 • generac.com

©2013 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice. Bulletin 0196870-A / Printed in U.S.A. 09/13/13